

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/098749 A1

(51) International Patent Classification⁷: **B01D 50/00**,
45/14

(74) Agent: **SHORE, Ronald, J.**; Antonelli, Terry, Stout &
Kraus, LLP, Suite 1800, 1300 North Seventeenth Street,
Arlington, VA 22209 (US).

(21) International Application Number:
PCT/US2003/011788

(22) International Filing Date: 17 April 2003 (17.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(63) Related by continuation (CON) or continuation-in-part
(CIP) to earlier application:
US PCT/US02/33220 (CIP)
Filed on 18 October 2002 (18.10.2002)

(71) Applicant (for all designated States except US):
SY-KLONE COMPANY, INC. [US/US]; 6451-1
Powers Avenue, Jacksonville, FL 32217 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOREDOCK,**
James, G. [US/US]; 12559 Lazy Meadow Drive South,
Jacksonville, FL 32225 (US). **EHRENBERG, Eric, L.**
[US/US]; 4075 Bald Eagle Lane, Jacksonville, FL 32257
(US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: POWERED AIR CLEANING SYSTEM AND METHOD OF MAKING SAME

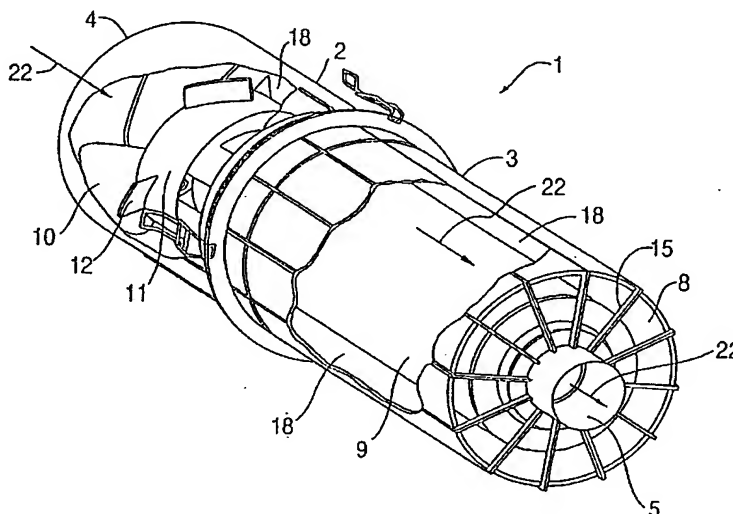

(57) Abstract: A powered air cleaning system (31) and a method of making the system are disclosed. The system comprises a flow path (22) extending through the system from an air inlet (4) to a clean air outlet (5). A motor-driven fan (24) located along the flow path draws particulate debris laden air into the inlet and rotates it about an axis (A-A) to form a rotating flow that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow. An ejector port (8) is provided for ejecting particulate debris laden air from the stratified rotating flow in the system to the environment. An air filter (9) located within the rotating flow and across the flow path upstream of the outlet filters air from the innermost orbits of the stratified rotating flow. The system is formed of a plurality of components (2, 3) separately mountable in remote locations (32, 33) in a device to be supplied with clean air. The components are interconnected with an intermediate pipe assembly (34).

WO 2004/098749 A1

WO 2004/098749 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

8/pts
JC20 Rec'd PCT/PTO 17 OCT 2009**POWERED AIR CLEANING SYSTEM AND
METHOD OF MAKING SAME**TECHNICAL FIELD

5 The present invention is directed to an improved powered, atmospheric
ejective, air cleaning system and a method of making the same for efficiently
removing debris from debris laden air to supply clean air to a device with which the
system is used. For example, the invention is useful in connection with total air flow
applications such as ventilation systems, as a fixed air flow provider for heat
10 exchangers and heating and air conditioning systems, and with devices having a
variable air flow demand, particularly internal combustion engines which exert a
variable vacuum on their air intake to be supplied with clean air.

BACKGROUND AND SUMMARY

15 Air intakes that centrifugally separate heavier-than-air particles from the air to
be used in internal combustion engines, ventilation systems, and other apparatus
that draw in air laden with debris, are known. The use of in-line filters in air delivery
systems to clean the air is also, per se, known. However, air filters are subject to
plugging by debris from the air passing through the filter, which eventually increases
20 the restriction to air flow through the filter and decreases the operating performance
of an associated device, such as an electronically controlled internal combustion
engine being supplied with air through the filter. Frequent filter replacement and
shorter service intervals may also be required, which increases the cost of operation.
There is a need for an improved air cleaning system and method of making the same
25 which combine centrifugal separation and air filtration in a manner to efficiently

remove debris from debris laden air while reducing or avoiding the aforementioned problems.

A powered air cleaning system according to the invention comprises a flow path extending through the system from an air inlet to a clean air outlet. A motor-driven fan is located along the flow path to draw particulate debris laden air into the inlet and rotate it about an axis to form a rotating flow that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow. An ejector port is provided for ejecting particulate debris laden air from the stratified rotating flow in the system to the environment. An air filter is located within the rotating flow and across the flow path upstream of the clean air outlet for filtering air from the innermost orbits of the stratified rotating flow. According to the disclosed example embodiments of the invention, the filter is elongated in the direction of the axis about which the debris laden air is rotated. An outer peripheral surface of the filter within the rotating flow is swept by innermost orbits of the stratified rotating flow for minimizing debris buildup on the filter.

In the example embodiments the system comprises a plurality of separable components, each defining a portion of the flow path through the system, the components being detachably connected to each other in two embodiments or located remotely, where they are separately mounted, and interconnected by an intermediate pipe assembly in a third embodiment. This modular nature of the system, with separable fan housing and air filter housing components, affords flexibility in making the system in devices with limited spaces for the system components.

A method of making a powered air cleaning system of the invention comprises forming a powered air cleaning system as a plurality of components, each defining a respective portion of a flow path through the system from an inlet to an outlet, the components including first and second components, the first component having a
5 motor-driven fan located along the flow path to draw particulate debris laden air into the inlet and rotate it about an axis to form a rotating flow that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow, and the second component having a separator-ejector chamber in the flow path downstream of the motor-driven fan, an air filter located within the separator-ejector
10 chamber and across the flow path upstream of the outlet for filtering air from the innermost orbits of the stratified rotating flow, and an ejector port for ejecting particulate debris laden air from the stratified rotating flow in the system. The method further comprises separately mounting the first and second components in remote locations in a device requiring a supply of clean air, such as a device having
15 a variable air flow demand, e.g. an internal combustion engine, and interconnecting the flow path through the first and second components with an intermediate pipe assembly which forms a portion of the flow path of the system.

These and other features and advantages of the present invention will become more apparent from the following description when taken in connection with
20 the accompanying drawings, which show, for purposes of illustration only, three example embodiments in accordance with the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view from the front, inlet end, and to one side, of a powered air cleaning system/apparatus according to a first, example embodiment of the present invention.

5 Fig. 2 is a perspective view from the back, outlet end, and to one side, of the air cleaning system of Fig. 1, shown, schematically, connected to an air intake of a device with a variable air flow demand.

Fig. 3 is a view of the system similar to Fig. 1 with portions of the housing cut away to show components within the housing.

10 Fig. 4 is a view of the system similar to Fig. 2 with portions of the housing cut away to depict components inside the housing.

Fig. 5 is a view of the system like Fig. 1 except with a portion of the housing removed and with the filter in the system removed to show the clean air outlet orifice through the back, outlet end of the housing.

15 Fig. 6 is a perspective view of the system like Fig. 1 but with the detachable motorized fan housing and filter housing forming the system housing being separated from one another.

Fig. 7 is a detailed view of a portion of the joined detachable motorized fan housing and filter housing having a removable joining clip thereof as shown in Fig. 5.

20 Fig. 8 is a perspective view from the front, inlet end, and to one side, of the detachable motorized fan housing of the system of Fig. 1.

Fig. 9 is a perspective view from the back, outlet end of the detachable motorized fan housing system of Fig. 1.

Fig. 10 is a perspective view of a main primary air filter element used in the system of Fig. 1.

Fig. 11 is a perspective view of a secondary safety air filter element optionally used in the system of Fig. 1 inside of the main primary air filter element.

5 Fig. 12 is a perspective view of the filter housing from the front end with no filter installed therein.

Fig. 13 is a perspective view of the filter housing from the back, outlet end thereof with no filter installed.

10 Fig. 14 is a perspective view of the filter housing like Fig. 12 but with the optional safety filter installed.

Fig. 15 is a perspective view of the filter housing like Fig. 13 but with the main filter shown installed therein.

15 Fig. 16 is a perspective view from the back, outlet end, and to one side, of a second example embodiment of the air cleaning system/apparatus of the invention wherein the filter housing has a solid rear panel about the clean air outlet and an outer cylindrical wall, with a long ejection slot the length of the air filter.

20 Fig. 17 is a schematic, cross-sectional view taken at a right angle to the axis A-A of any of the disclosed embodiments, showing the provision of a debris strake connected to the air filter and extending the length of the filter to help channel the debris in the rotating flow of debris laden air away from the filter to the outer wall of the filter housing.

Fig. 18 is a perspective view from one side of a third example embodiment of the air cleaning system/apparatus of the invention wherein the air filter housing and the motor-driven fan housing are separately mounted remote from one another in a

device to be supplied with air from the system, the two housings being connected by an intermediate pipe assembly of the system.

Fig. 19 is a schematic, perspective view of the system of Fig. 18 showing a compression assembly located in the filter housing upstream of the air filter to ensure stratification of the debris laden air at the filter housing, the axis of the flow path between the fan housing and the filter housing being shown in dashed lines without illustration of the intermediate pipe assembly.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring now to the drawings, a powered air cleaning system or apparatus 1, Figs. 1-6, according to a first example embodiment is shown connected to the air intake 29 of a device 28, such as an internal combustion engine or other device requiring a supply of clean air, as shown schematically in Fig. 2. The system comprises a flow path 22 extending through the system from an air inlet 4 to a clean air outlet 5 which supplies clean air to the air intake 29 of device 28. The flow path is located within a generally cylindrical housing 23 of the system. Housing 23 is formed by two detachable components - motorized fan housing 2 and filter housing 3 which are detachably connected to one another at a service flange assembly 6 by joining clips 7, see Fig. 7. For this purpose each of the housings 2 and 3 has a joining flange, 16 and 17, respectively. The housings 2 and 3 are shown detached from one another in Fig. 6 and shown separately in Figs. 8 and 9, and 12 and 13, respectively.

A motor-driven fan 24, comprising a fan blade 10 mounted on the output shaft of an electric motor 13, is located along the flow path 22 to draw particulate debris laden air into the inlet 4 and rotate it about an axis A-A to form a rotating flow in the

system that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow. A compression assembly 11 in the form of an angled louver/motor mount assembly with fixed louvers or vanes 12 is located within the fan housing 2 downstream of the fan blade 10. The compression assembly compresses
5 the volume of the rotating flow of debris laden air drawn into the system inlet to increase the air velocity and centrifugal force acting on the airborne articles. The motor-driven fan 24 is supported at motor 13 thereof within the fan housing by way of the angle louver/motor mount assembly 11 as seen in Figs. 3, 4, 8 and 9.

A separator-ejector chamber 18 is provided in the flow path of the air cleaning
10 system downstream of the angled louver/motor mount assembly, Figs. 3-6, 9 and 15. The outermost orbits of the rotating flow pattern of debris laden air ride on the outer wall 27 of the separator-ejector chamber until reaching an annular ejector port 25 formed about the outlet 5 in the outlet end of the housing radially outward of the clean air outlet. The ejector port is formed by a series of circumferential radial
15 ejection slots 8 separated by strakes 15. The ejector port ejects particulate debris laden air from the stratified rotating flow in the system to the environment.

An air filter 9, Figs. 2-4, 6 and 15, in the form of a filter package of at least a main primary air filter element 20, Figs. 10 and 15, and optionally a secondary safety air filter element 21, Figs. 11 and 14, located within the filter element 20, is located
20 within the rotating flow and across the flow path upstream of the outlet for filtering air from the innermost orbits of the stratified rotating flow in the system as the air flows to the clean air outlet 5. The filter 9 is elongated in the direction of and extends along the central longitudinal axis A-A of the generally cylindrical housing 23 in the separator-ejector chamber from the outlet end, where it is mounted on clean air

outlet orifice 19, Fig. 5. The upstream end of the filter 9 is supported by a filter compression bracket 14 connected to a support flange 30, Fig. 9, on the end of motor 13.

Debris buildup on the outer surface of the filter 9 is minimized by locating the
5 filter within the rotating flow of the debris laden air in the separator-ejector chamber 18 and by returning particulate debris laden air from the stratified rotating flow in chamber 18 unrestricted through the ejector port 25 at the end of the chamber, e.g., without disrupting the stratified rotating flow in the chamber. The self cleaning action on the filter 9 has also been found to be enhanced, in supplying air to the air intake
10 29 of a device 28 having a cyclic air flow demand, such as an internal combustion engine which applies a variable vacuum to the outlet 5 of the system, by operating the motor-driven fan to maintain positive air flow pressure on the outer surface of the filter and to return debris laden air to the environment from the system at all rates of air flow demanded by the device. The air cleaning system 1 is designed to generate
15 a much larger air flow than the engine or apparatus 28 upon which it is installed requires, thereby providing a consistent positive air flow pressure to the filter keeping debris buildup on the air filter to a minimum and providing a powerful air flow out of the 360° ejection port 25 formed by the series of radial ejection slots 8 located at the end of the separator-ejector chamber.

20 The air cleaning system and method of making the same of the invention make it possible to maintain low air filter restriction throughout normal service intervals for internal combustion engines and other apparatus by significantly extending air filter life over current service intervals. While the air cleaning system and method of making the same have been described specifically for use in

supplying clean air to an internal combustion engine, the invention is not limited to such a use but has wide application for a variety of devices requiring a supply of clean air including ventilation systems, heat exchangers, air compressors, and heating and air conditioning systems.

5 A second example embodiment of the powered air cleaning system or apparatus 31 of the invention shown in Fig. 16 is like the system or apparatus 1 of the first example embodiment except for the filter housing, 32 in Fig. 16. That is, instead of providing the ejector port in the outlet end of the filter housing radially outward of the clean air outlet as in the first example embodiment, in the filter
10 housing 32 the ejector port 33 is located radially outward of the outermost orbits of the rotating flow opposite the air filter. In particular, the ejector port 33 is in the form of a slot in the outer wall of the separator-ejector chamber of the filter housing, the slot extending the length of the air filter. The outlet end of the housing 32 has a solid panel, e.g. is closed, about the clean air outlet 5.

15 Thus, instead of the debris being allowed to stay in its stratified state for the length of the housing until it is ejected at the rear of the system or apparatus as in the first example embodiment, in the system or apparatus 31 with filter housing 32, as the debris hits the outer orbits of the separation pattern, it is immediately ejected from the rotating flow and the system or apparatus through the ejector slot 33. This
20 feature facilitates directing the debris away from the system or apparatus and channeling the debris away from the device, such as an internal combustion engine, on which the system or apparatus is installed. The air filter within the filter housing 32 can also advantageously be subjected to the slight positive pressure during use,

reducing restriction to the engine or other device on which the system or apparatus is installed.

Another feature of the invention shown in Fig. 17 can be used with each of the example embodiments. This involves the provision of a debris strake 34 on the outer
5 periphery of the air filter 9. The strake 34 extends longitudinally the length of the air filter and extends outwardly from the outer periphery of the filter in a direction of the rotating flow, shown by arrow B in Fig. 17, for channeling debris in the rotating flow adjacent the air filter away from the filter to the outermost orbits of the rotating flow for ejection from the system.

10 A third example embodiment of the powered air cleaning system or apparatus 35 of the invention shown in Fig. 18 is like the system or apparatus 1 of the first example embodiment or the system or apparatus 31 of the second example embodiment except that the detachable components, motorized fan housing 2 and filter housing 3/32 (identified only as 3 in Figs. 18 and 19) are separately mounted at
15 remote locations 36 and 37, respectively, of the device requiring a supply of clean air. An additional pipe assembly 38 is used to connected the separated housings. The housings 2 and 3/32 are each detachable from respective ends of the pipe assembly to facilitate installation, assembly and disassembly for repair or replacement of the system and its component parts.

20 An optional feature of the system 35 shown in Fig. 19 is the provision of a remote compression assembly in the form of a louvered collar 39 having a plurality of stationary vanes 40 in the flow path to direct the debris-laden air into proper rotating flow. That is, the compression assembly compresses the volume of the rotating flow of debris laden air to increase the air velocity and centrifugal force acting on the

airborne particles. In the example embodiment, louvered collar 39 is located in the filter housing 3/32 upstream of the air filter 9 and supports the upstream end of the air filter in lieu of the filter compression bracket, 14 in the first embodiment. The same or an additional louvered collar 39 with vanes 40 can also be attached to the back or downstream side of the fan housing 2 to ensure proper rotating flow in the system 35. Because of the plurality of separable components, each of which is separately mountable to the device, the system is modular, permitting flexibility in adapting the system to complex devices requiring a supply of clean air.

While we have shown and described only three embodiments in accordance with the present invention, it is understood that the same is not limited thereto, but is susceptible to numerous changes and modifications as known to the skilled in the art. For example, the powered air cleaning systems of the invention can be used without the air filter 9 to supply air to a device where centrifugal separation of debris from debris laden air and withdrawal of air from the innermost orbits of the rotating flow in the system by a vacuum from the device at the outlet of the system provides satisfactory cleaning. In this regard, it is noted that the positive pressure in the device maintains flow through the ejector port of the system while the pressure at the clean air outlet remains essentially neutral, with or without air filter 9. The device draws clean air from the clean air outlet in accordance with its demand, e.g., vacuum pull applied to the clean air outlet of the system. Therefore, we do not wish to be limited to the details shown and described herein, but instead to cover all such changes and modifications as are encompassed by the scope of the appended claims.

CLAIMS

WHAT IS CLAIMED IS:

1. A powered air cleaning system comprising:
 - a flow path extending through the system from an inlet to an outlet;
 - 5 a motor-driven fan located along the flow path to draw particulate debris laden air into the inlet and rotate it about an axis to form a rotating flow that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow;
 - an ejector port for ejecting particulate debris laden air from the stratified rotating flow in the system;
 - 10 an air filter located within the rotating flow and across the flow path upstream of the outlet for filtering air from the innermost orbits of the stratified rotating flow;
 - wherein the system includes at least one component defining a portion of the flow path through the system, which component is separable from the system.
- 15 2. The air cleaning system according to claim 1, wherein the at least one component is selected from the group consisting of a detachable fan housing containing the motor-driven fan and a detachable filter housing containing the air filter.
- 20 3. The air cleaning system according to claim 2, including both a detachable fan housing and a detachable filter housing.
4. The air cleaning system according to claim 3, wherein the fan housing and the filter housing are detachably connected to each other.

5. The air cleaning system according to claim 3, further comprising an intermediate pipe assembly forming a portion of the flow path, the fan housing and the filter housing being detachably connected to respective ends of the intermediate
5 pipe assembly.

6. The air cleaning system according to claim 5, further comprising a compression assembly located in the filter housing upstream of the air filter for compressing the volume of the rotating flow of debris laden air to increase the air
10 velocity and centrifugal force acting on the airborne particles.

7. The air cleaning system according to claim 6, wherein the compression assembly provides support for an upstream end of the air filter.

15 8. The air cleaning system according to claim 6, wherein the compression assembly includes a plurality of stationary vanes in the flow path.

9. The air cleaning system according to claim 5, further comprising a compression assembly located in the fan housing for compressing the volume of the
20 rotating flow of debris laden air to increase the air velocity and centrifugal force acting on the airborne particles.

10. The air cleaning system according to claim 9, wherein the compression assembly provides support for the motor-driven fan.

11. The air cleaning system according to claim 9, wherein the compression assembly includes a plurality of stationary vanes in the flow path.

5 12. The air cleaning system according to claim 1, further comprising a separator-ejector chamber in the flow path downstream of the motor-driven fan, the outermost orbits of the rotating flow riding on an outer wall of the separator-ejector chamber to the ejector port.

10 13. The air cleaning system according to claim 12, wherein the filter is located centrally within the separator-ejector chamber and is elongated in the direction of the axis about which the debris laden air is rotated.

15 14. The air cleaning system according to claim 13, wherein the at least one component which is separable from the system includes a filter housing detachably connected to the system, the filter housing containing the separator-ejector chamber, air filter and the ejector port.

20 15. The air cleaning system according to claim 13, wherein an outer peripheral surface of the elongated filter is cylindrical.

16. A powered air cleaning system comprising:
a flow path extending through the system from an inlet to an outlet;

a motor-driven fan located along the flow path to draw particulate debris laden air into the inlet and rotate it about an axis to form a rotating flow that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow;

an ejector port for ejecting particulate debris laden air from the stratified
5 rotating flow in the system;

an air filter located within the rotating flow and across the flow path upstream of the outlet for filtering air from the innermost orbits of the stratified rotating flow;
and

an intermediate pipe assembly forming a portion of the flow path between the
10 motor-driven fan and the air filter so the fan and filter can be remote from one another.

17. The air cleaning system according to claim 16, further comprising a compression assembly located along the flow path between the intermediate pipe
15 assembly and the air filter for compressing the volume of the rotating flow of debris laden air to increase the air velocity and centrifugal force acting on the airborne particles.

18. The air cleaning system according to claim 17, wherein the
20 compression assembly provides support for an upstream end of the air filter in the flow path of the system.

19. The air cleaning system according to claim 17, wherein the compression assembly includes a plurality of stationary vanes in the flow path.

20. The air cleaning system according to claim 16, further comprising a fan housing containing the motor-driven fan, the fan housing being detachably connected to an upstream end of the pipe assembly.

5

21. The air cleaning system according to claim 16, further comprising a filter housing containing the air filter, the filter housing being detachably connected to a downstream end of the pipe assembly.

10

22. A method of making a powered air cleaning system comprising:

forming a powered air cleaning system as a plurality of components, each defining a respective portion of a flow path through the system from an inlet to an outlet, the components including first and second components, the first component having a motor-driven fan located along the flow path to draw particulate debris laden air into the inlet and rotate it about an axis to form a rotating flow that stratifies the debris laden air with the heaviest particles in the outermost orbits of the rotating flow, and the second component having a separator-ejector chamber in the flow path downstream of the motor-driven fan, an air filter located within the separator-ejector chamber and across the flow path upstream of the outlet for filtering air from the innermost orbits of the stratified rotating flow, and an ejector port for ejecting particulate debris laden air from the stratified rotating flow in the system;

15

20

separately mounting the first and second components in remote locations in a device to be supplied with clean air; and

interconnecting the flow path through the first and second components with an intermediate pipe assembly which forms a portion of the flow path of the system.

23. The method according to claim 22, including providing a compression
5 assembly in the second component upstream of the air filter for compressing the volume of the rotating flow of debris laden air to increase the air velocity and centrifugal force acting on the airborne particles.

1/8

FIG. 1


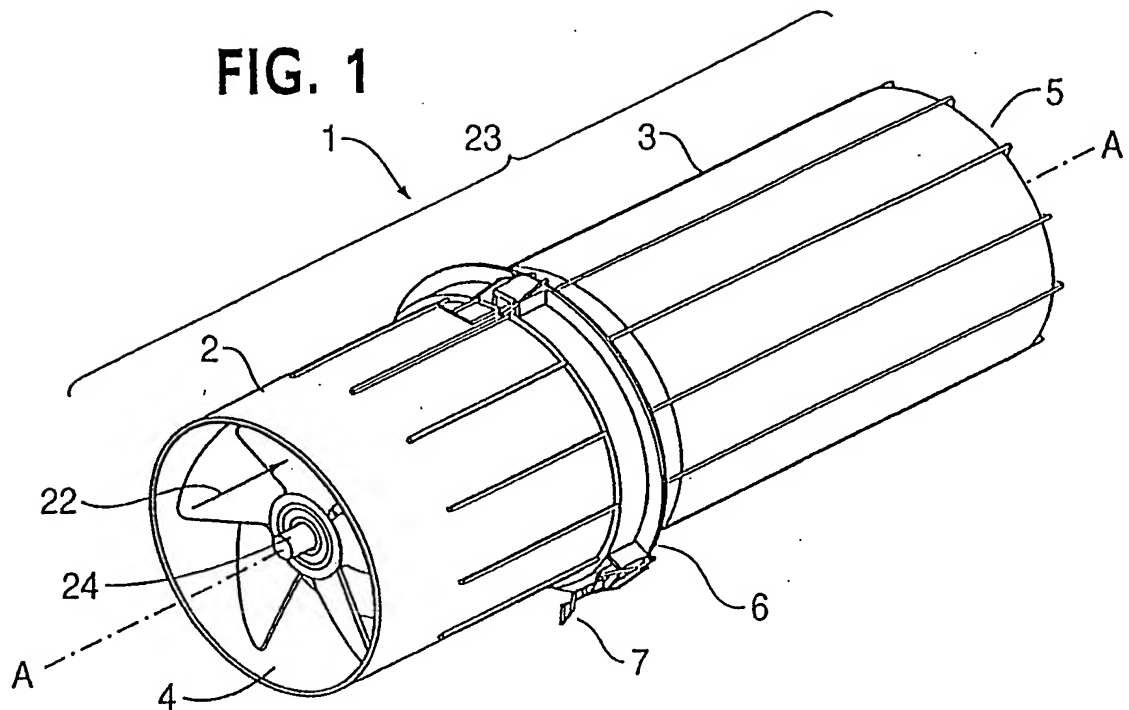


FIG. 2

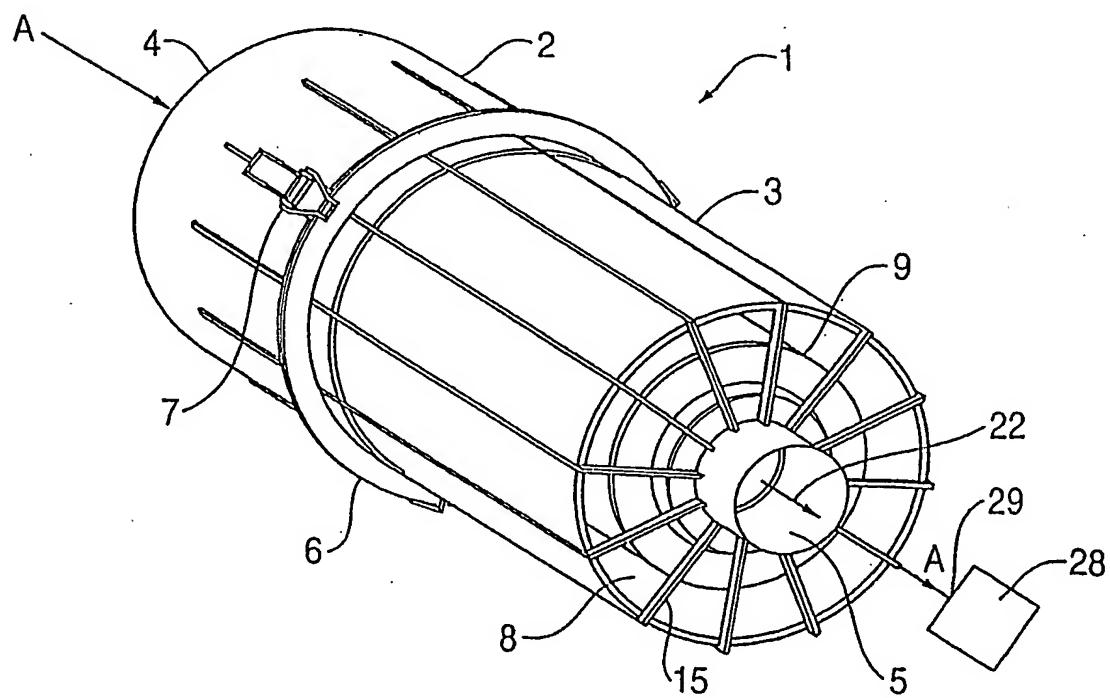

2 / 8

FIG. 3

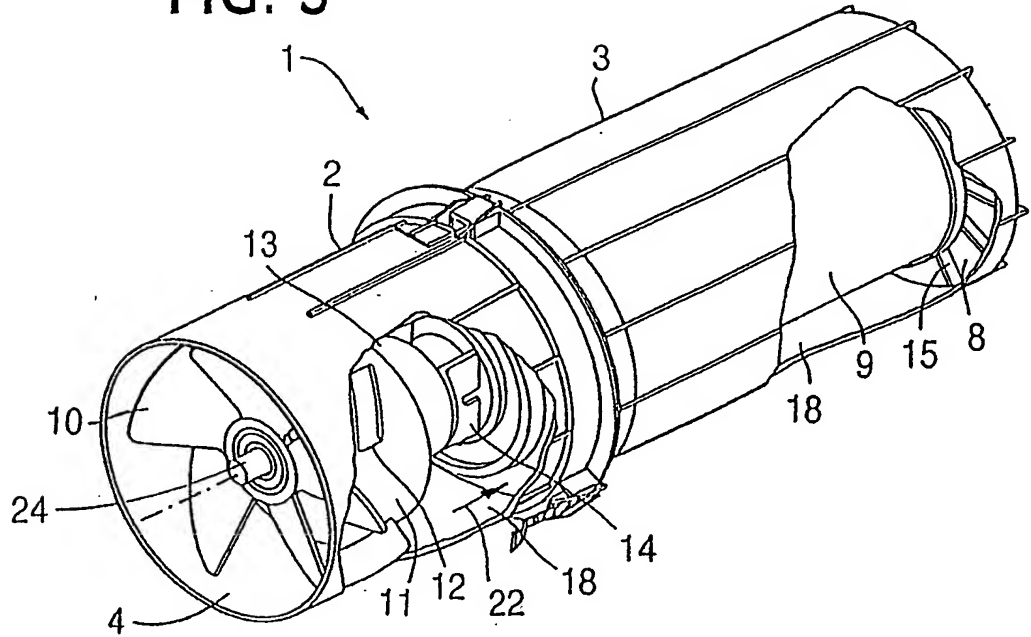


FIG. 4

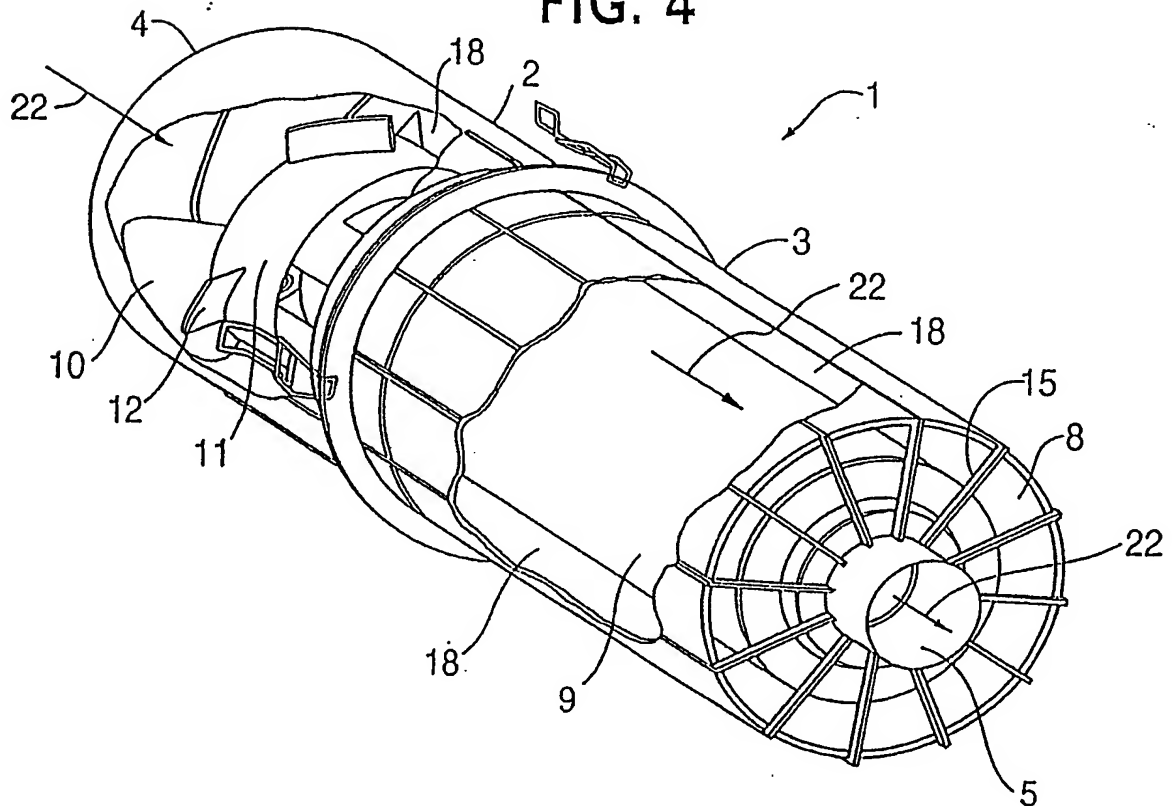


FIG. 5


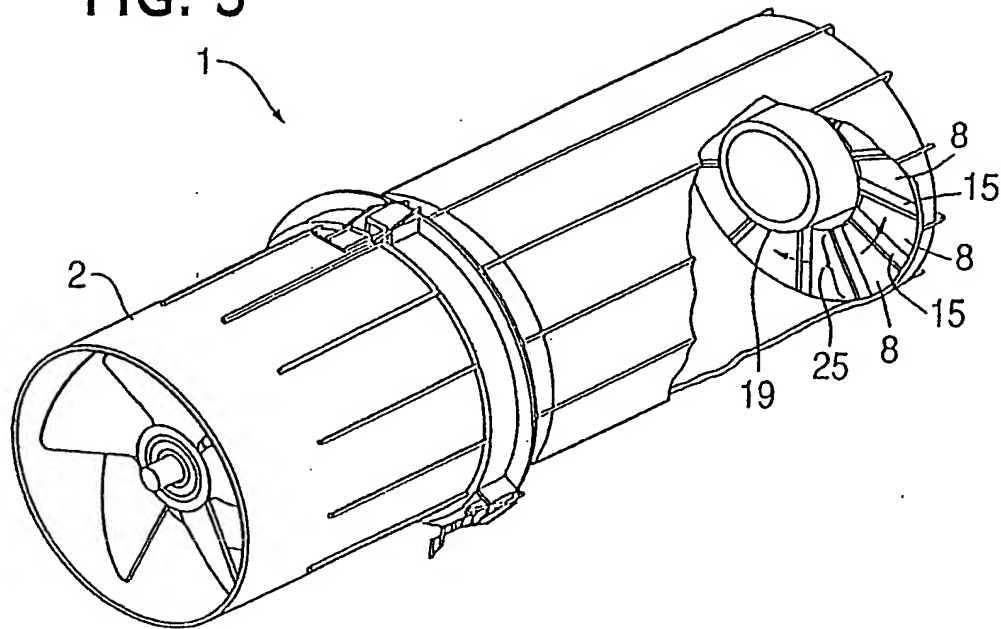


FIG. 6

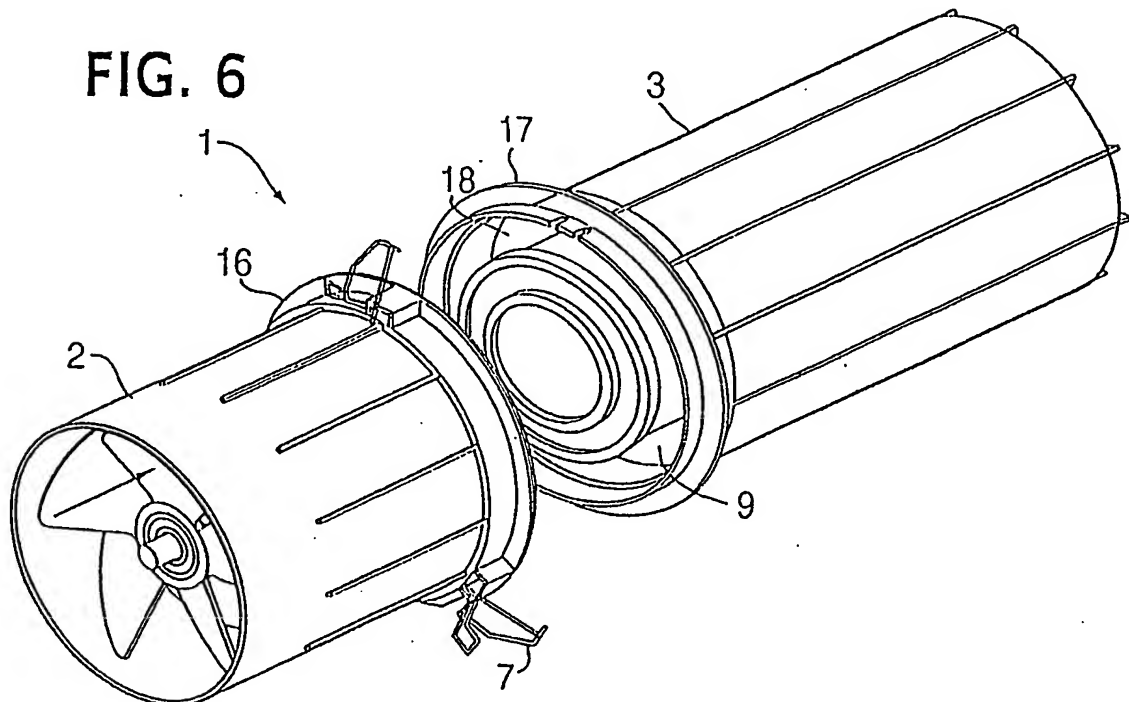

4/8

FIG. 7

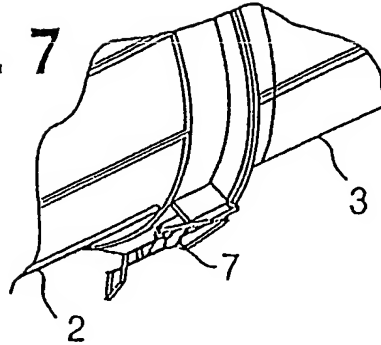


FIG. 8


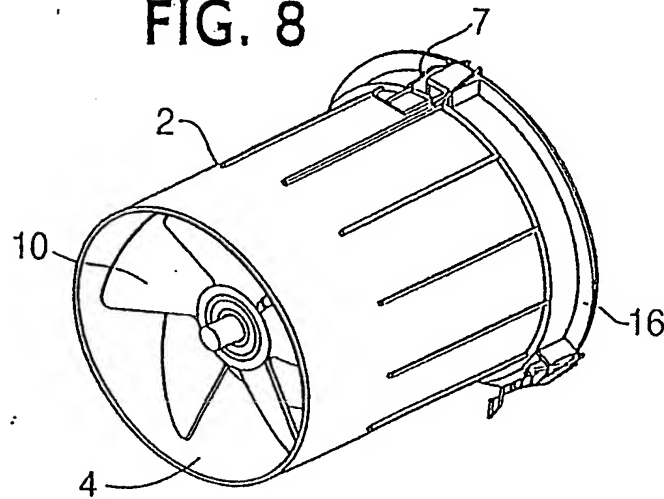


FIG. 9

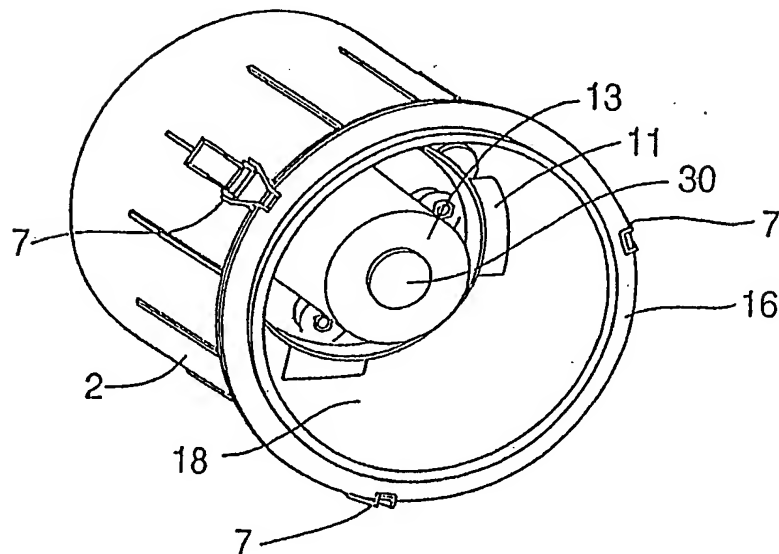

5 / 8

FIG. 10

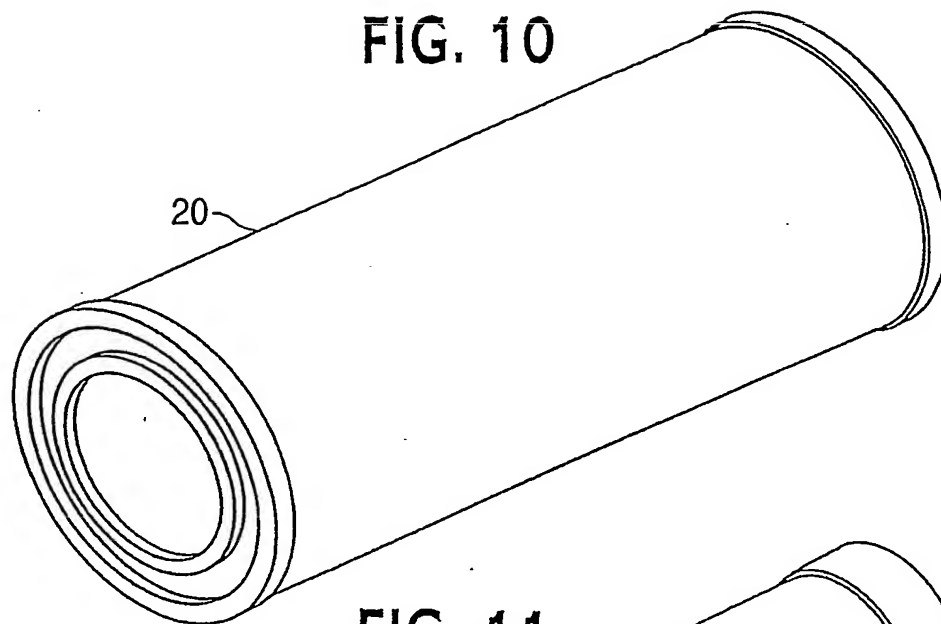


FIG. 11


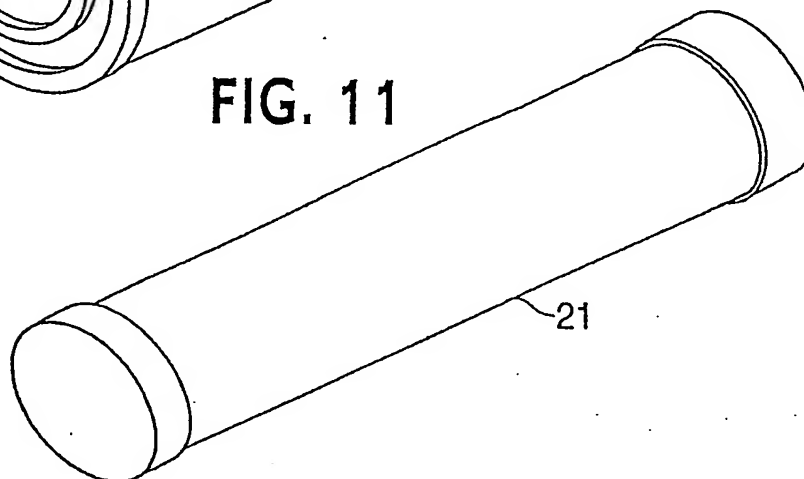


FIG. 12

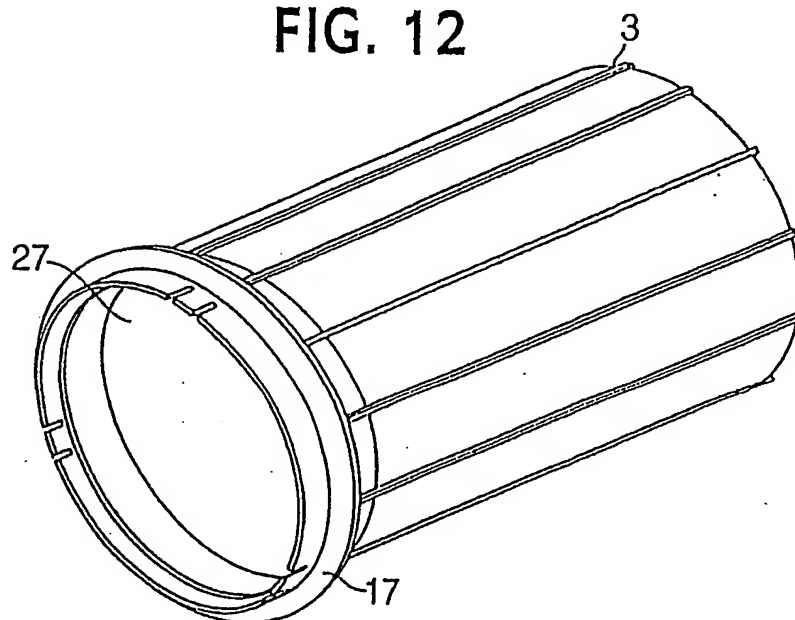

6/8

FIG. 13

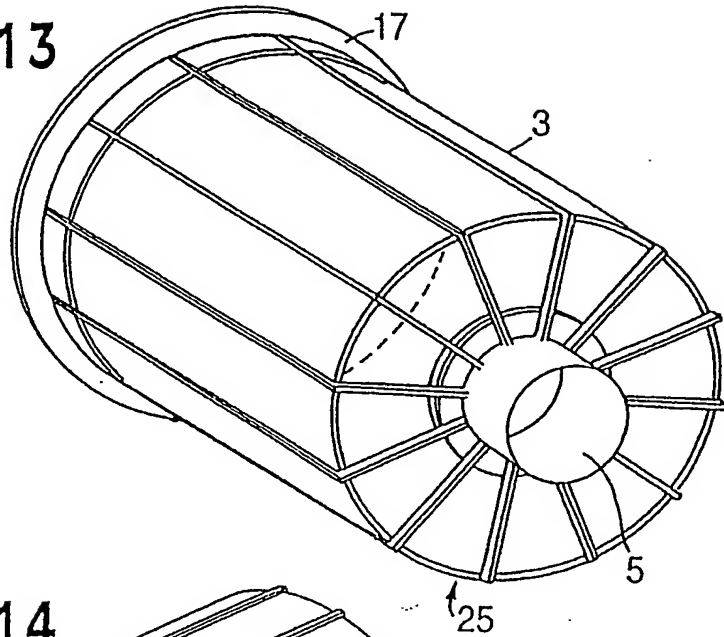


FIG. 14


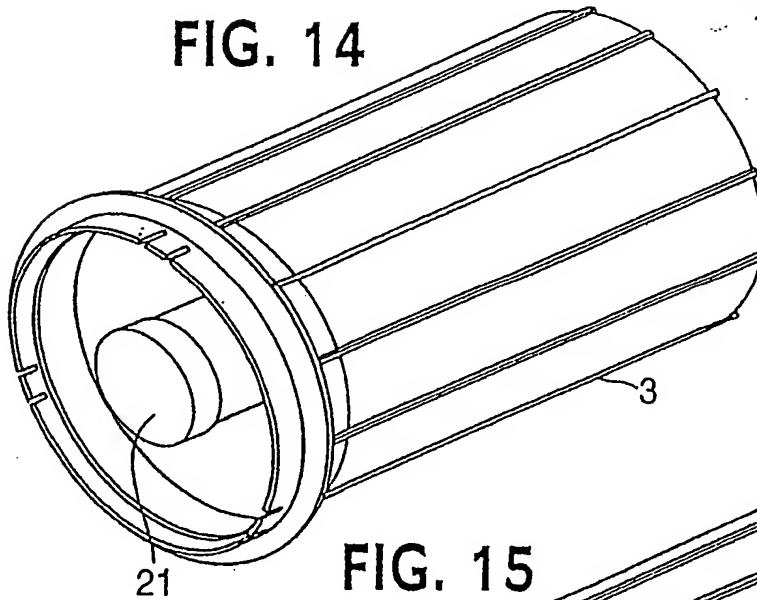


FIG. 15

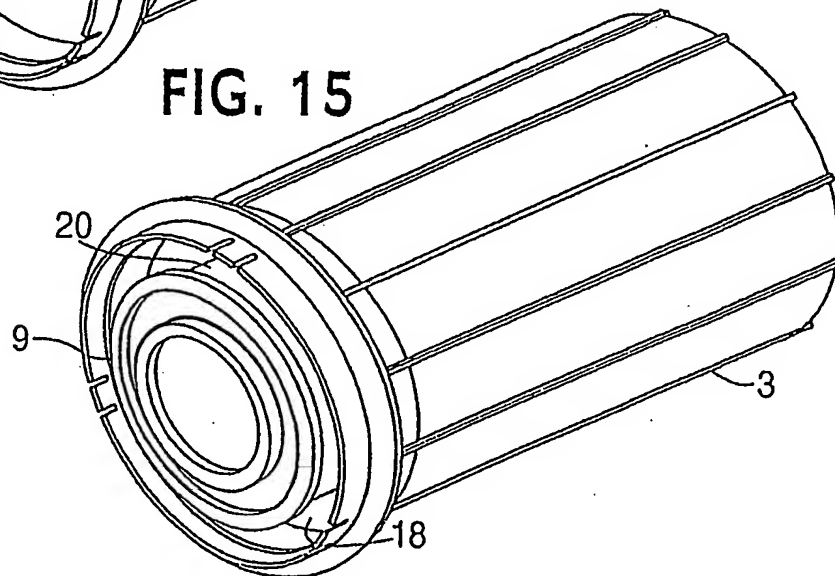

7/8

FIG. 16


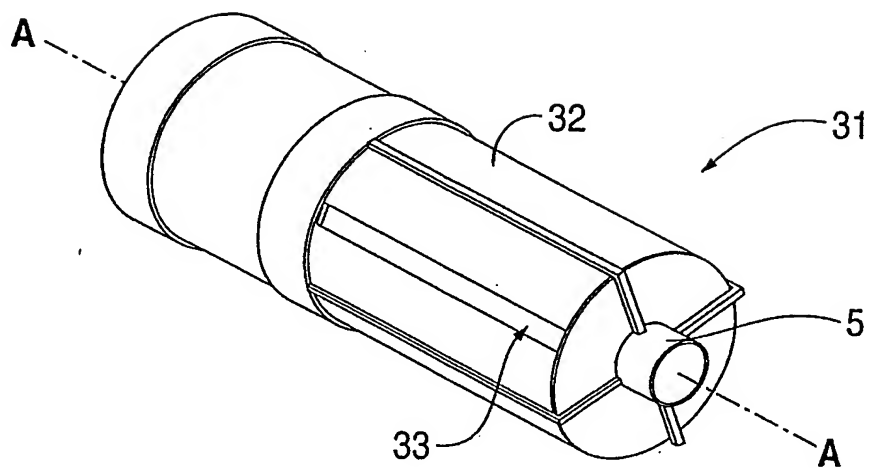


FIG. 17

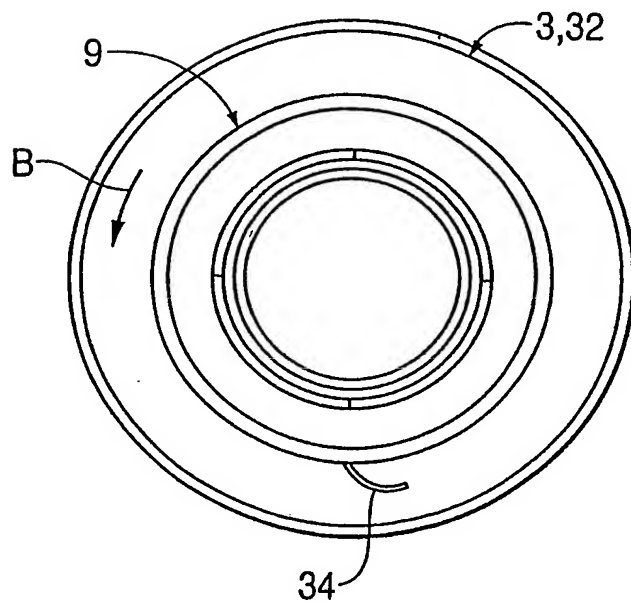

8/8

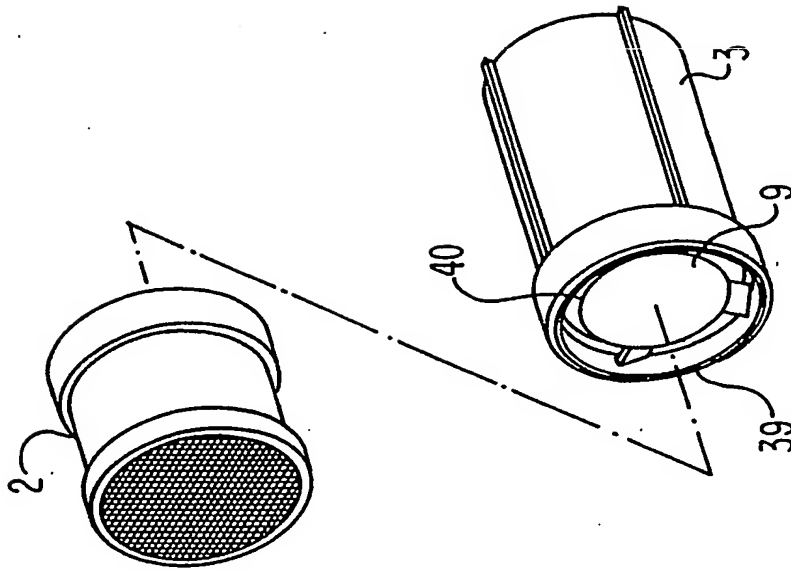


FIG. 19

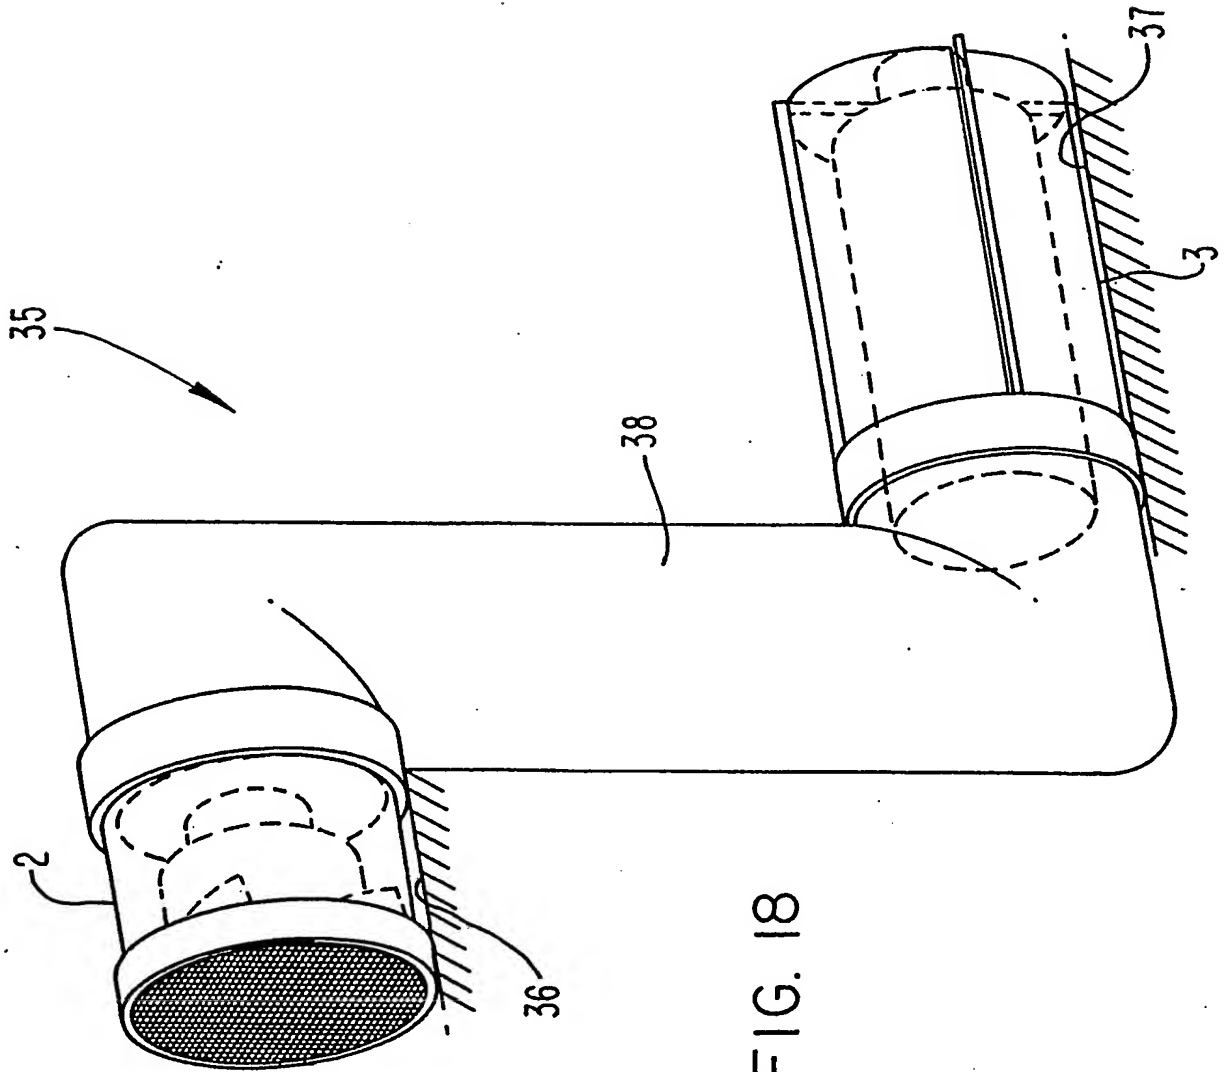


FIG. 18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/11788

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B01D 50/00, 45/14

US CL : 95/ 268, 270; 55/337, 385.3, 396, 401, 437, 457, 467, 503

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 95/ 268, 270; 55/337, 385.3, 396, 401, 437, 438, 457, 467, 503

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,545,241 A (VANDERAUWERA et al) 13 August 1996, entire reference.	1-23
A	US 6,319,304 B1 (MOREDOCK) 20 November 2001, entire reference.	1-23
A	US 4,048,911 A (PETERSON) 20 September 1977, entire reference.	1-23

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

26 June 2003 (26.06.2003)

Date of mailing of the international search report

17 JUL 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Robert A Hopkins

Telephone No. 703-308-0661